



MODELS : TMDG-12 TMDG-24 TMDG-36 TMDG-48

QUANTITY: _____ ITEM No. _____

COUNTERTOP GAS GRIDDLE

TMDG-12

TMDG-24

TMDG-36

TMDG-48

APPLICATION

The Toastmaster Countertop Gas Griddle is the most economical and flexible in the food service industry. It offers unsurpassed performance, combining a proven control system with Toastmaster quality and durability.

With your proper care and maintenance you will experience years of reliable and trouble-free operation.

STANDARD FEATURES

- Front including top rail is all stainless steel. Rear and sides are aluminized steel.
- Hi-Off valve with one standing pilot each burner.
- 3/4" rear gas connection.
- Provided with stainless steel drip pan.
- Rest on 4" adjustable steel legs.



WARRANTY

One year from the date of purchase.

INQUIRE FROM FACTORY FOR SPECIAL OR CUSTOM REQUIREMENTS.


TOASTMASTER has a policy of continuous product research and development. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.



Middleby Philippines Corporation


113 Technology Avenue Technopark, Binan, Laguna, Philippines 4024
Tel. Nos.: (02)520-8170 to 79/ Fax Nos.: (02)520-8191/ (049)541-1361

COUNTERTOP GAS GRIDDLE

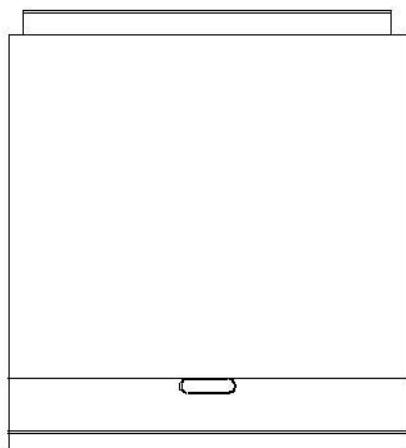


LENGTH

TOP VIEW

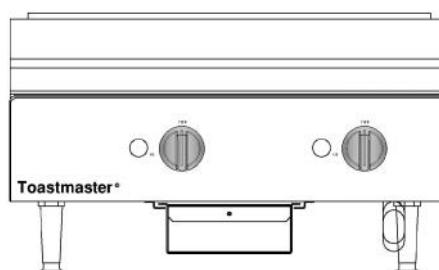

HEIGHT

FRONT VIEW

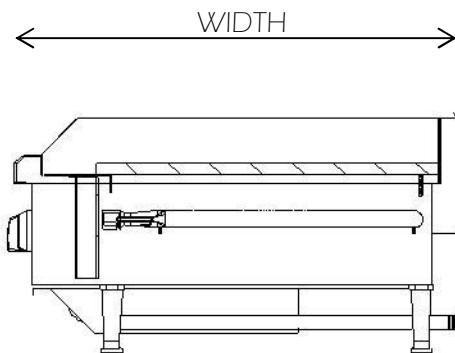

WIDTH

SIDE VIEW

DIMENSIONS					COOKING AREA	
MODEL	UNITS	LENGTH	WIDTH	HEIGHT	LENGTH	WIDTH
TMDG-12	MM(IN)	306(12)	686(27)	352(14)	306(12)	648(26)
TMDG-24	MM(IN)	609(24)	686(27)	365(14)	609(24)	648(26)
TMDG-36	MM(IN)	914(36)	686(27)	365(14)	914(36)	648(26)
TMDG-48	MM(IN)	1219(48)	686(27)	365(14)	1219(48)	648(26)

CONSTRUCTION (BIDDING) SPECIFICATION	MODEL	No. OF BURNERS	TOTAL BTU RATINGS	SHIPPING WEIGHT
Cabinet : Front including top rail is all stainless steel. Rear and sides are aluminized steel.	TMDG-12	1	20,000	42Kg
Gas Heat Control System : Hi-Off valve with one standing pilot each burner.	TMDG-24	2	40,000	84Kg
Installation Requirements : Recommended to install under vented hood.	TMDG-36	3	60,000	125Kg
TMDG: Each burner rated 20,000 BTU per hour for natural gas and 20,000 BTU for propane gas.	TMDG-48	4	80,000	166Kg
Approvals : A.G.A. and C.G.A. design certified, N.S.F. listed.				

- Toastmaster equipment is built to comply with applicable standards for manufacturers. Included are ULC-UL, NSF, ETL, C-ETL and others. Many local codes exist and it is the responsibility of the owner and installer to comply.
- Check local codes for fire and sanitary regulations.

INTENDED FOR COMMERCIAL USE ONLY

Toastmaster, in line with its policy to continually improve its product, reserves the right to change materials or specifications without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions, or replacements for previously purchased equipment.



Middleby Philippines Corporation
113 Technology Avenue Technopark, Binan, Laguna, Philippines 4024
Tel. Nos.: (02) 520-8170 to 79 / Fax Nos.: (02) 520-8191 / (049) 541-1361